




## RCI-1512 Rated Capacity Indicator

**ROBWAY**

Cost-effective solutions / World-wide support / Quality and innovation

- Specifically designed for articulated tractor cranes
- Simplified lift-point operator selection
- All lift points covered including *man basket*
- Capable of monitoring:
  - all manual extendtions
  - static and mobile lifts
  - crane articulation
  - slope angle
- Outputs external lights & alarm
- On-board data logging

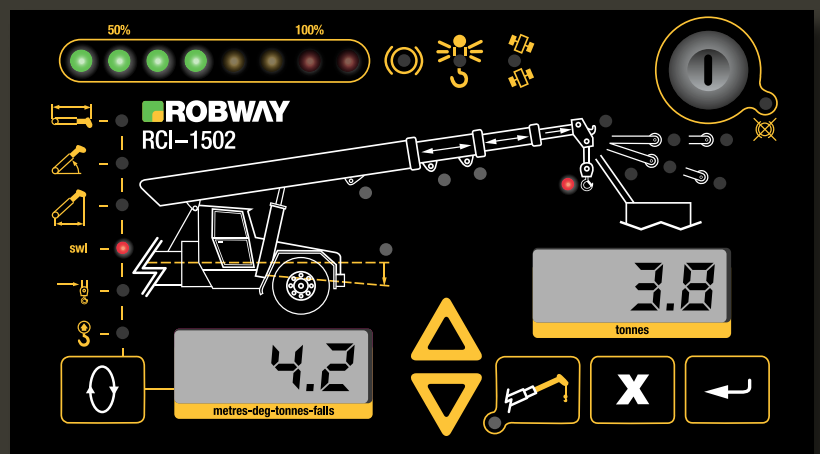


# RCI-1512 Rated Capacity Indicator

Internationally Recognised Certification

## Specifications

- Digital display in 0.1 increments
- Open and shut circuit sensor detention
- Ultra low power consumption
- Reverse power connection protection
- Outputs for motion-cut and alarms
- On-board push button calibration
- Up to 2 pressure transducer inputs
- Slope and slow monitoring options
- Temp range: -20°C to 70°C
- Power Supply: 10.5 to 40VDC
- Satellite communication facility, data logging options
- Calibration up/download facility
- Simplified weightless calibration techniques

## Configuration

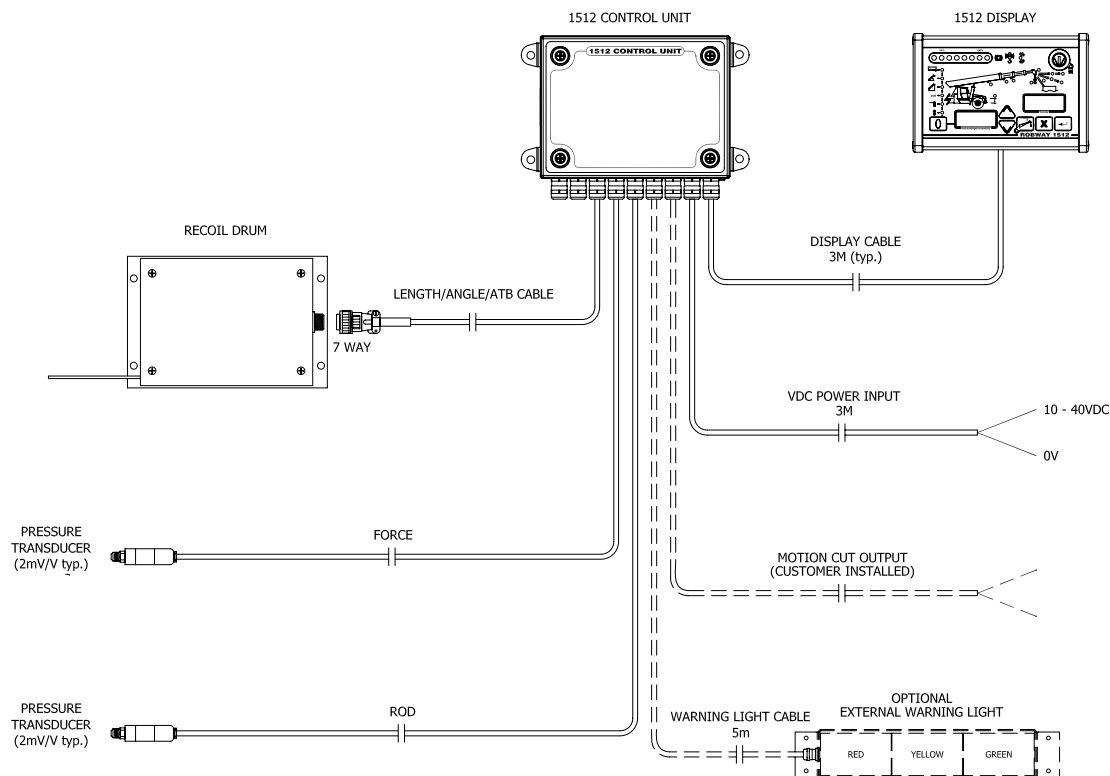

\*Simplified Load moment - General Arrangement